

# UTFL series FLOOD LUMINAIRE

## UTFL-100ZG4 UTFL-200ZG4 UTFL-250ZG4 UTFL-300ZG3 UTFL-250ZG4A UTFL-300ZG4A

### Features :

- © Welded aluminum housing with powder coated finish for corrosion resistance and high IP rating
- © UTFL-100/150/200/250/300ZG4 models feature a clear tempered glass lens while the UTFL-250/300ZG4A have a UV
- © Aluminum reflector with vacuum coated inner surface

### Lamp and ballast :

- © Ultra-Tech's 100W ~300W round tubular induction lamps feature superior lighting efficiency, producing more visually effective lumens (VEL) per watt than other lighting sources
- © Rated lamp life of 100,000 hours, the equivalent of 11 years at 24 hours per day, 365 days per year with a warranty of 10 years or 50,000 hours which ever comes first
- © Instant strike, flicker free, no cool down required, insensitive to numbers of on off, fast warm-up
- © Induction lamps are full spectrum containing R/G/B and C/M/Y resulting in a high CRI

### Applications :


- © Billboards, building, parks, pools, plazas.

### Installation :


- © Installation method must allow for free airflow around the ballast to comply with warranty requirements

### Dimensions :

Unit: inches (mm)

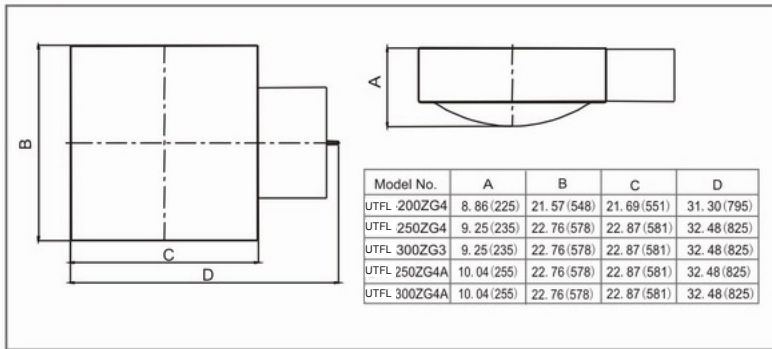

### Photometric :

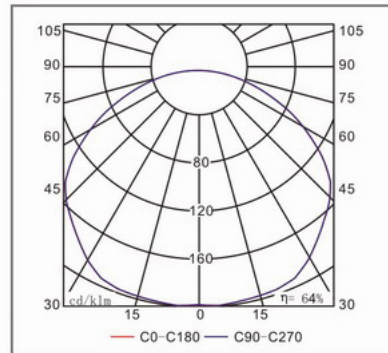

### Fixture Specifications :

No.	Fixture Model No.	Lamp	Wattage (W)	Lamp lumens (Lm)	Voltage (V)	Color Temperature (K)	Ambient (°C)	Installation	IP class	CBM	N.W. (Kg)/(LBs)	G.W. (Kg)/(LBs)	Note	UL CUL
1	UTFL-100ZG4	RT100W	100	7500-8500	100-300	5000	-20~+50	Square pole	IP54	0.129	13.60 (Kg)/ /24.48 (LBs)	14.60 (Kg)/ /26.28 (LBs)	Curve tempered glass lens.	√
2	UTFL-200ZG4	RT200W	200	16000-17000										
3	UTFL-250ZG4	RT250W	250	20000-21250										
4	UTFL-300ZG3	RT300W	300	24000-25500										
5	UTFL-250ZG4A	RT250W	250	20000-21250										
6	UTFL-300ZG4A	RT300W	300	24000-25500										
													PC lens	

\* Note: Color Temperature 2720-6500K available upon request.

