

UTRL series ROAD WAY LUMINAIRE

UTRL-70ZD1 UTRL-100ZD1



Features :

- © High pressure die cast aluminum alloy housing for corrosion resistance.
- © Flat tempered glass lens
- © High purity aluminum reflector with vacuum coated inner surface
- © Optional photocell

Lamp and ballast :

- © Ultra-Tech's 40W ~100W round tubular induction lamps feature superior lighting efficiency, producing more visually effective lumens (VEL) per watt than other lighting sources
- © Rated lamp life of 100,000 hours, the equivalent of 11 years at 24 hours per day, 365 days per year with a warranty of 10 years or 50,000 hours which ever comes first
- © Instant strike, flicker free, no cool down required, insensitive to numbers of on off, fast warm-up
- © Induction lamps are full spectrum containing R/G/B and C/M/Y resulting in a high CRI



Applications :


- © Freeway, highway, parking lots, public entrances, off-street areas

Installation :


- © Installation method must allow for free airflow around the ballast to comply with warranty requirements

Dimensions :

Unit: inches (mm)

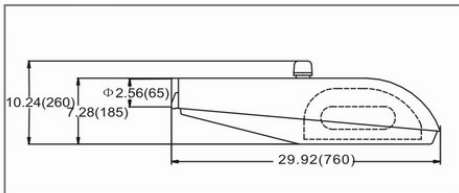

Photometric :



Fixture Specifications :

No.	Fixture Model No.	Lamp	Wattage (W)	Lamp lumens (Lm)	Voltage (V)	Color Temperature (K)	Ambient (°C)	Installation	IP class	CBM	N.W. (Kg)/ (LBs)	G.W. (Kg)/ (LBs)	Note	UL CUL
1	UTRL-70ZD1	RT40W	40	2600-3000	100-300	5000	-20~+50	Round pole	IP55	0.079	6.20	7.50	Optional photocell	√
		RT70W	70	4900-5600							/11.16	/13.50		
2	UTRL-100ZD1	RT80W	80	5600-6400	100-300	5000	-20~+50	Round pole	IP55	0.079	6.20	7.50	Optional photocell	√
		RT100W	100	7500-8500							/11.16	/13.50		

* Note: Color Temperature 2720-6500K available upon request.