

UTRL series ROAD WAY LUMINAIRE

UTRL-LD5

Features :

- © Housing is made of cast aluminum alloy for corrosion resistance and durability
- © The lampshade is made of tempered glass for safety resistance to yellowing and excellent light transmission
- © AlanoD reflector uses nano-oxidization technology for maximum reflectivity and efficiency

Lamp and ballast :

- © Ultra-Tech's 40W-250W rectangular tubular induction lamps feature superior lighting efficiency, producing more visually effective lumens (VEL) per watt than other lighting sources
- © Rated lamp life of 100,000 hours, the equivalent of 11 years at 24 hours per day, 365 days per year with a warranty of 10 years or 50,000 hours which ever comes first
- © Instant strike, flicker free, no cool down required, insensitive to numbers of on off, fast warm-up
- © Ultra-Tech's electronic ballast featuring optional Vari-Lume™ controlled dimming technology for linear and step dimming functions via light sensor, RF signal, carrier signal, motion detection, autoranging from 110V-277V, power factor >0.95
- © Induction lamps are full spectrum containing R/G/B and C/M/Y resulting in a high CRI

Applications :


- © Road lighting

Installation :


- © Installation method must allow for free airflow around the ballast to comply with warranty requirements

Dimensions :

Unit: inches (mm)

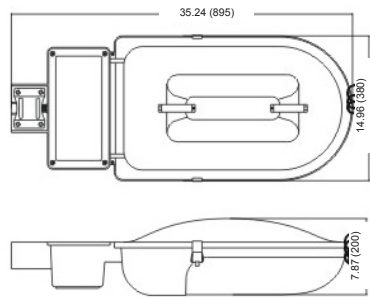

Photometric :



Fixture Specifications :

Fixture Model No.	Lamp	Wattage (W)	Lamp lumens (Lm)	Voltage (V)	Color Temperature (K)	Ambient (°C)	Installation	IP class	UL CUL
UTRL-LD5-40W	ST40W	40	2800-3200	100-300	5000	-20~+50	"U" bracket	IP65	Pending
UTRL-LD5-60W	ST60W	60	4200-4800						
UTRL-LD5-80W	ST80W	80	5600-6400						
UTRL-LD5-100W	ST100W	100	7500-8500						
UTRL-LD5-120W	ST120W	120	9000-10200						
UTRL-LD5-150W	ST150W	150	12000-12750						
UTRL-LD5-200W	ST200W	200	16000-17000						
UTRL-LD5-250W	ST250W	250	20000-21250						

* Note: Color Temperature 2720-6500K available upon request.