



# ULTRA-TECH™ LIGHTING

## SNOW-BRIGHT™

### SNBT-FL-60WC1



- Snow-Bright™ LUMENTEC® tuned spectrum
- Color Rendition Index (CRI) > 90
- 100,000 hour life cycle
- 110V ~ 277V auto-sensing ballast
- Instant strike/re-strike
- Large format full dispersion light source
- Full diffusion nano particle reflector
- Powder-coated all-weather aluminum
- IP65 rated WF2 anti-corrosion grade
- 150mph wind resistance

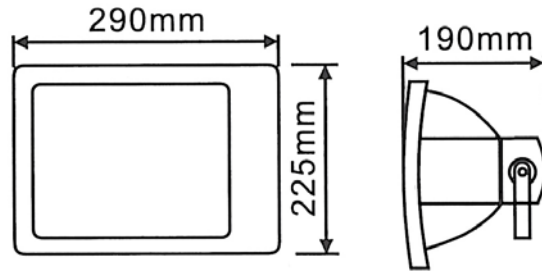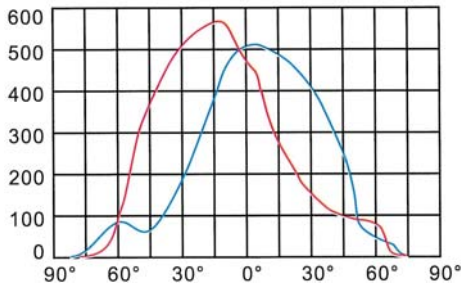

The Snow-Bright™ 60-watt Mini Wide Area Dispersion floodlight is ideal for walkways, tubing parks, cross-country trails, parking lots, and outdoor venues. The unique full spectrum full diffusion lamp is capable of replacing 200 to 250-watt high pressure sodium and metal halide fixtures for energy savings of up to 70%. Unique reflector geometry provides precision cut-off and minimal light pollution. Mercury is a solid encapsulated amalgam that makes Snow-Bright™ environmentally friendly and safe. No special handling is required. No hazardous material disposal is necessary.



Snow-Bright™ light actually reflects internally within snow crystals to provide stunning resolution with very low energy consumption. Instant strike means never having to wait for a warm-up or cool-down. The SNBT-FL-60WC1 will not disturb nocturnal wildlife such as owls and moose. Equally important, it is a neighbor-friendly fixture that can be focused away from surrounding buildings and homes. Snow-Bright™ lights are not affected by temperature.

**Contact: Philip Gotthelf**  
**(201) 784-1233 x 100 (office)**  
**(201) 401-6068 (cell)**  
**P.O. Box 566, Closter, NJ 07624-0566**



# TECHNICAL SPECIFICATIONS

<b>MODEL</b>	<b>SNBT-FL-60WC1</b>
RATED WATTAGE	60W
VOLTAGE RANGE	120V~277V $\pm$ 15%
CURRENT	0.5102A~0.2210A
FREQUENCY	50/60Hz
POWER FACTOR	0.98
IN-RUSH CURRENT	NEGLIGIBLE
RFI PART 15/18	SHIELDED
NOISE	<20dB
TYPE	MAGNETIC INDUCTION
COLOR RENDITION INDEX	>95
COLOR TEMPERATURE	~6500K UV TRUNCATED
CERTIFICATIONS	UL/UL-C/CCC/CE/FC/RoHS/CB
B.U.G. RATING	0/0/<110
DARK SKY	COMPLIANT G(0)
UL-C	WET LOCATION
TEMPERATURE RANGE	-30°F ~ +140°F
RATING	IP65 WF2 ANTI-CORROSION
FINISH	WF2 ANTI-CORROSION
REFLECTOR	FULL-DIFFUSION NANO-PARTICLE
WIND RATING U-BRACKET	75mph ~ 100mph gust
WIND RATING SLIP-FITTER	NOT AVAILABLE
LUMENS PER WATT	95LPW~105LPW
VISUALLY EFFECTIVE LUMENS	277/W

