



ULTRA-TECH™ LIGHTING

SNOW-BRIGHT™

SNBT-TL-400WA3

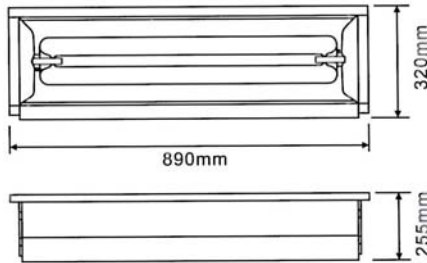

- Snow-Bright™ LUMENEC® tuned spectrum
- Color Rendition Index (CRI) > 90
- 100,000 hour life cycle
- 110V ~ 277V auto-sensing ballast
- Instant strike/re-strike
- Nano-reflector technology
- Powder-coated all-weather aluminum
- IP65 rated WF2 anti-corrosion grade
- 150mph wind resistance

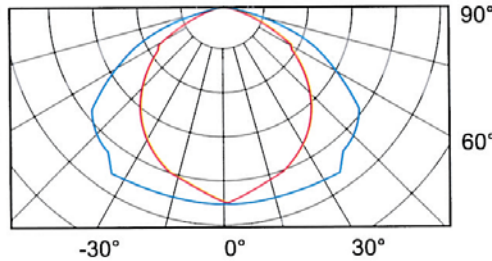

The Snow-Bright™ 400-Watt rectangular floodlight is ideal for wide area lighting on all types of slopes, tubing parks, cross-country trails, snowmobiling tracks, beginner areas, and even parking lots. In particular, the SNBT-TL-400WA3 can be mounted to follow steeper slope inclines and race courses. The unique full-spectrum full-diffusion lamp is capable of replacing 1200W high pressure sodium and metal halide fixtures for energy savings of up to 65%. Unique full cut-off technology and canted mounting allows changing the lamp focus, minimizing light pollution. Mercury is a solid encapsulated amalgam that makes Snow-



Bright™ environmentally friendly and safe. No special handling required. Snow-Bright™ light (on left slope and foreground) actually reflects internally within snow crystals to provide stunning resolution with very low energy consumption. Instant strike means never having to wait for a warm-up or cool-down. The SNBT-TL-400WA3 will not disturb nocturnal wildlife such as owls and moose.

Equally important, it is a neighbor-friendly fixture that can be focused away from surrounding buildings and homes. Snow-Bright™ lights are not affected by temperature, maintaining luminosity well below freezing.

Contact: Philip Gotthelf • (201) 784-1233 x 100 (office) • (201) 401-6068 (cell)
PO Box 566, Closter, NJ 07624-0566



TECHNICAL SPECIFICATIONS

MODEL	SNBT-TL-WA400
RATED WATTAGE	400W
VOLTAGE RANGE	120V~277V \pm 15%
CURRENT	1.47A~3.40A
FREQUENCY	50/60Hz
POWER FACTOR	0.98
IN-RUSH CURRENT	NEGLIGIBLE
RFI PART 15/18	SHIELDED
NOISE	<20dB
TYPE	MAGNETIC INDUCTION
COLOR RENDITION INDEX	>95
COLOR TEMPERATURE	~6500K UV TRUNCATED
CERTIFICATIONS	UL/UL-C/CCC/CE/FC/RoHS/CB
B.U.G. RATING	0/0/<110
DARK SKY	COMPLIANT G(0)
UL-C	WET LOCATION
TEMPERATURE RANGE	-30°F ~ +140°F
RATING	IP65 WF2 ANTI-CORROSION
FINISH	WF2 ANTI-CORROSION
REFLECTOR	FULL-DIFFUSION NANO-PARTICLE
WIND RATING U-BRACKET	75mph ~ 100mph gust
WIND RATING SLIP-FITTER	110mph ~ 150mph gust
LUMENS PER WATT	95LPW~105LPW
VISUALLY EFFECTIVE LUMENS	277/W

