



ULTRA-TECH™ LIGHTING GOLF-BRIGHT™

GB-FL-150WC1

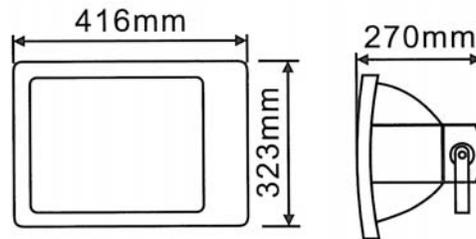

- Golf-Bright™ LUMENTEC® tuned spectrum
- Color Rendition Index (CRI) > 90
- 100,000 hour life cycle
- 110V ~ 277V auto-sensing ballast
- Instant strike/re-strike
- Large format full dispersion light source
- Full diffusion nano particle reflector
- Powder-coated all-weather aluminum
- IP65 rated WF2 anti-corrosion grade
- 150mph wind resistance

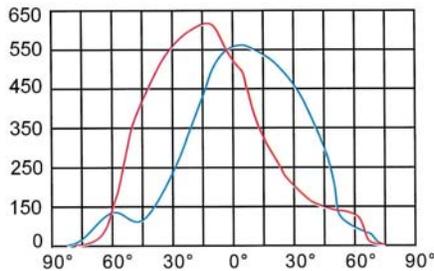

The Golf-Bright™ 150-watt Wide Area Dispersion Floodlight is the ultimate replacement fixture for 400-watt metal halide and high pressure sodium box-format floods. With energy savings of 70%, this light is perfect for greens, driving ranges, miniature golf, parking lots, and outdoor venues. The unique full spectrum/full diffusion design is capable of replacing 400 to 500-watt high pressure sodium and metal halide fixtures for energy savings of up to 75%. Unique reflector geometry provides precision cut-off and minimal light pollution. Mercury is a solid encapsulated amalgam that makes Golf-Bright™ environmentally friendly and safe. No special handling is required. No hazardous material disposal is necessary.



The Golf-Bright™ spectrum is tuned to precisely resolve a golf ball against a dark sky or green grassy surface to provide stunning resolution with very low energy consumption. Instant strike means never having to wait for a warm-up or cool-down. The GB-FL-150WC1 will not disturb nocturnal wildlife such as owls and deer. Equally important, it is a neighbor-friendly fixture that can be focused away from surrounding buildings and homes. Golf-Bright™ lights are not affected by temperature.



TECHNICAL SPECIFICATIONS

MODEL	SNBT-FL-150WC2
RATED WATTAGE	150W
VOLTAGE RANGE	120V~277V \pm 15%
CURRENT	1.27A~0.5525A
FREQUENCY	50/60Hz
POWER FACTOR	0.98
IN-RUSH CURRENT	NEGLIGIBLE
RFI PART 15/18	SHIELDED
NOISE	<20dB
TYPE	MAGNETIC INDUCTION
COLOR RENDITION INDEX	>95
COLOR TEMPERATURE	~6500K UV TRUNCATED
CERTIFICATIONS	UL/UL-C/CCC/CE/FC/RoHS/CB
B.U.G. RATING	0/0/<110
DARK SKY	COMPLIANT G(0)
UL-C	WET LOCATION
TEMPERATURE RANGE	-30°F ~ +140°F
RATING	IP65 WF2 ANTI-CORROSION
FINISH	WF2 ANTI-CORROSION
REFLECTOR	FULL-DIFFUSION NANO-PARTICLE
WIND RATING U-BRACKET	75mph ~ 100mph gust
WIND RATING SLIP-FITTER	110mph ~ 150mph gust
LUMENS PER WATT	95LPW~105LPW
VISUALLY EFFECTIVE LUMENS	277/W

Contact: **Philip Gotthelf**
(201) 784-1233 x 100 (office)
(201) 784-6068 (cell)
PO Box 566 • Closter • New Jersey • 07624-0566
Info@ultratechlighting.com

