


The All-New Energy Efficient Solution
for Car Showrooms!

OFBT-CAN-40/60/80W3A



- Office-Bright™ LUMENTEC® tuned spectrum
- Color Rendition Index (CRI) > .95
- 100,000 hour life cycle
- 110V ~ 277V auto-sensing ballast
- Instant strike/re-strike
- Large format full dispersion light source
- Full diffusion nano particle reflector
- Electrostatic spray coated aluminum
- Frosted or clear lens options

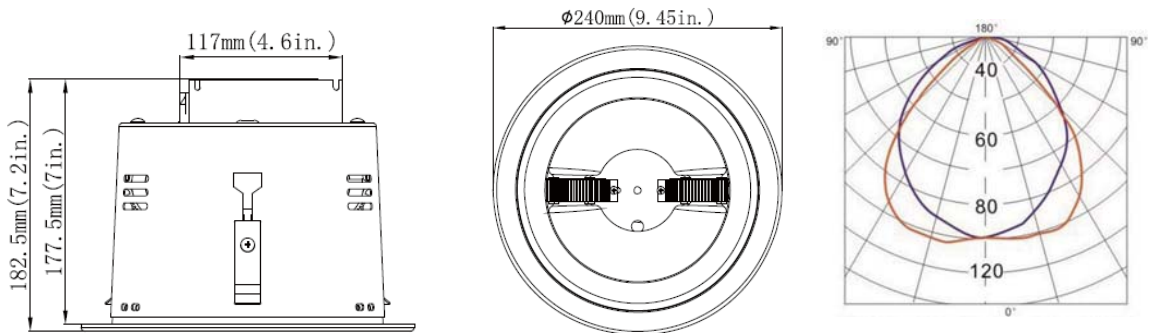

Presenting an all-new Office-Bright™ ceiling can fixture specifically tuned to maximize the appearance of car showrooms. The unique full spectrum full diffusion lamp is available in 40W, 60W, and 80W and can replace traditional ceiling cans, troffers and fluorescent 2 x 4 lighting for energy savings of up to 85%. Reduce in-rush current up to 95%. Nano-particle coating allows provides even light distribution without hot-spots or voids. Solid encapsulated mercury is environmentally friendly and safe. No special handling required. No hazardous material disposal.

Proprietary LUMENTEC® spectral tuning gives stunning resolution and contrast for all car colors and finishes. Special mood enhancing technology increases the chance of a positive buying decision. Flicker-free operation provides a more comfortable environment with less eye strain. There is no strobe effect as with LEDs. Extraordinarily high color rendition index (CRI)



means all colors will appear as clear as daylight. Instant strike means never having to wait for a warm-up or cool-down. The OFBT-CAN-40/60/80W3A for car showrooms uses Health-Bright™ technology that can actually **increase sales**. The extraordinary 100,000 hour life cycle can lower maintenance costs by as much as 600% over conventional lighting. No excessive glare or danger of eye damage like LEDs.

TECHNICAL SPECIFICATIONS

MODEL	OFBT-CAN-40/60/80W3A
RATED WATTAGE	40W – 80W
VOLTAGE RANGE	120V~277V ± 15%
CURRENT	0.5102A~0.2210A
FREQUENCY	50/60Hz
POWER FACTOR	0.98
IN-RUSH CURRENT	NEGLIGIBLE
RFI PART 15/18	SHIELDED
NOISE	<20dB
TYPE	MAGNETIC INDUCTION
COLOR RENDITION INDEX	> .95
COLOR TEMPERATURE	2,100K~10,000K UV TRUNCATED
CERTIFICATIONS	UL/UL-C/CCC/CE/FC/RoHS/CB
TEMPERATURE RANGE	-30°F ~ +140°F
RATING	INDOOR DRY LOCATION
FINISH	ELECTROSTATIC SPRAY
REFLECTOR	FULL-DIFFUSION NANO-PARTICLE
LUMENS PER WATT	95LPW~105LPW
VISUALLY EFFECTIVE LUMENS	277/W

FEATURES	MH	HPS	LED	Office-Bright™	Other MIL
100,000 hour lifecycle (11 yrs @ 24hrs/365 days)	No	No	No	YES	Yes
Up to 85% energy savings	< 30%	None	Some	YES	Some
LUMENTEC® Technology	No	No	No	YES	No
Instant strike - no warm up or cool down	No	No	Yes	YES	Yes
Full Spectrum with CRI > .95	Few	No	No	YES	Some
Color Temperatures 2100K~10000K	Rare	No	Rare	YES	Some
Exceptionally high power factor > .95	No	No	Some	YES	Some
Negligible "In-Rush" current	No	No	No	YES	YES
Unparalleled Warranty 5 years 50K hrs	No	No	Some	YES	Some
Fully recyclable, no special disposal	No	No	No	YES	Yes
Lease Financing Available	No	No	No	YES	No

Contact: Philip Gotthelf
(201) 784-1233 x 100 (office)
(201) 401-6068 (cell)
P.O. Box 566, Closter, NJ 07624-0566

